

-Electric Cutting Machines



BLOCK CUTTER B-15

For mix brick and plaster slabs. Strength: 4,409.2 Lb.
(2.000 kg.).
Maximum cutting length: 21"(55 cm.). Width: 1" - 6 1/8"
(2,5 - 15,5 cm.)

BLOCK CUTTER B-15-S



SLAB CUTTER T-41

Maximum cutting length: 16" (41 cm.). Strength: 2,204.6 Lb. (1.000 kg.).

SLAB CUTTER T-41

الفا نوكس



SLAB CUTTER T-51

Maximum cutting length: 20" (51 cm.). Strength: 2,204.6 Lb. (1.000 kg.).

SLAB CUTTER T-51

ANNOOS



BLOCK CUTTER B-13

For cutting concrete blocks. Strength: 9,038.9 Lb. (4.100 kg.).

Maximum cutting length: 12" (31 cm.). Width: 4" (10,5 cm.).

BLOCK CUTTER B-13



BLOCK CUTTER B-14-S

For cutting concrete blocks. Strength: 9,038.9 Lb. (4.100 kg.).

Maximum cutting length: 16" (41 cm.). Width: 1" - 6 1/8" (2,5 - 15,5 cm.).

BLOCK CUTTER B-14-S

BLOCK CUTTER B-20

For cutting concrete blocks. Strength: 9,038.9 Lb. (4.100 kg.).

- Maximum cutting length: 16" (41 cm.). Width: 4 17/32" - 8 3/32" (11,5 - 20,5 cm.).



BLOCK CUTTER B-20



DIAMANT ND-200

Light, compact tile cutter with great cutting capacity
For gres, ceramic, glass, tiles, marble and other materials.

Ø 8" (200 mm.) diamond disc included in ND-200

With thermic security switch.

Water refrigeration of the blade.

Electric cable: 4.9 ft. (1,5 m.).

Tip-up table for mitring up to 20" (50 cm.) for ND-200

With guide to allow repetitive cuts.

Stainless steel work-table.

Direct drive.

Adjustable accessories.

DIAMANT ND-200 220V 60Hz.

DIAMANT ND-180-BL

Single-phase motor•

For earthenware, glazed tiles, ceramic tiles, heat-resistant tiles and other materials.

Diamond blade Ø 7" (180 mm.) included.

With thermic security switch.

Water refrigeration of the blade.

Electric cable: 4.9 ft. (1,5 m.).

With a platform that folds up to 7 7/8" for mitre cutting (20 cm.).

Guide for 45° cuts.

With guide to allow repetitive cuts.

Adjustable accessories



ND-180-BL 220V 60HZ WITHOUT CASE

ND-180-BL 230V 60HZ WITH CASE AND EXTRA BLADE

DU-200-L BL BASIC LINE

For gres, ceramic, glass, tiles, marble and other materials

Diamond blade Ø 8" (200 mm.) included.

Motor assembly mounted on fold-away sliding bearings for miter cuts.

61" Electric Cable

With guide to allow repetitive cuts and adjustable square.

Direct Drive.



BL-DU-200-L-BL 220V 60HZ



DIAMANT DW-250-NL

For gres. ceramic. glass. tiles. marble and other materials.

•Ø 10" (250 mm.) diamond disc included in DW-250-NL.
With thermic security switch.

Water pump: refrigeration of blade (with flow control valve).

Motor assembly mounted on sliding bearings, with vertically

adjustable and foldable mobile head for miter cuts.

Includes wheels and a handle to ease the movement of the machine and its loading on to a vehicle.

Detachable table to facilitate the cleaning of the machine.

System of foldable legs.

New guide with an easily adjustable ruler.

New channelling system with hose and wiring.

Reinforced chassis, structural rigidity.

Vertically adjustable mobile head with plunge cut.

Direct drive

Using plunge cut effect can cut up to 103 cm

DW-250-NL 220V 60HZ

الوانوس

ALFANOOS



DIAMANT DW-250-N

For gres, ceramic, glass, tiles, marble and other materials.

Ø 10 (250 mm.) diamond disc included in DW-250-N.

With thermic security switch.

Water pump refrigeration of blade (with flow control valve).

Motor assembly mounted on fold-away sliding bearings for miter cuts.

Includes wheels and a handle to ease the movement of the machine and its loading on to a vehicle.

System of foldable legs.

Detachable table to facilitate the cleaning of the machine.

New guide with an easily adjustable ruler.

Electric cable: 4.9 ft. (1,5 m.)

Reinforced chassis, structural rigidity.

Vertically adjustable mobile head with plunge cut.

Direct drive.

Using plunge cut effect can cut up to 75 cm

DIAMANT DW-250-N 220V 60Hz

DIAMANT DS-250 1500



Machine of great precision and functionality, ideal for mitre cutting.

For gres, ceramic, glass, tiles, marble and other materials.

Mixed modular structure, in aluminium and steel for maximum lightness and resistance.

Retractable legs with "shield" function and wheels for easy transportation.

Aluminium guide with anti-flexion geometry with measuring guide and lateral stops for longitudinal cuts.

With thermic and overload security switches.

Water pump refrigeration of blade (with flow control valve).

Diamond blade Ø 10" (250 mm.) not included.

With a double set of platens, one specially designed for mitre cuts.

Motor assembly mounted on sliding bearings, with vertically

adjustable and foldable mobile head for miter cuts.

Protection system for the use of segmented blades.

With guide for repetitive cuts.

Aluminium working surface removable for easy cleaning.

New, removable water tank system.

Machine supplied without the cable.

Ceramic fixing accessory NOT included.

DIAMANT DS-250 1500 220V 60HZ

ALFANOOS



DIAMANT DS-250 1000

Machine of great precision and functionality, ideal for mitre cutting.

For gres, ceramic, glass, tiles, marble and other materials Mixed modular structure, in aluminium and steel for maximum lightness and resistance.

Retractable legs with "shield" function and wheels for easy transportation.

Aluminium guide with anti-flexion geometry with measuring guide and lateral stops for longitudinal cuts.

With thermic and overload security switches.

Water pump refrigeration of blade (with flow control valve).

Diamond blade Ø 10" (250 mm.) not included.

With a double set of platens, one specially designed for mitre cuts.

Motor assembly mounted on sliding bearings, with vertically adjustable and foldable mobile head for miter cuts.

Protection system for the use of segmented blades.

With guide for repetitive cuts.

Aluminium working surface removable for easy cleaning.

New, removable water tank system.

Machine supplied without the cable.

Ceramic fixing accessory NOT included.

DIAMANT DS-250 1000 220V 60HZ

ALFANOOS

DIAMANT DS-250 1300



Machine of great precision and functionality, ideal for mitre cutting.

For gres, ceramic, glass, tiles, marble and other materials.

Mixed modular structure, in aluminium and steel for maximum lightness and resistance.

Retractable legs with "shield" function and wheels for easy transportation.

Aluminium guide with anti-flexion geometry with measuring guide and lateral stops for longitudinal cuts.

With thermic and overload security switches.

Water pump refrigeration of blade (with flow control valve).

Diamond blade Ø 10" (250 mm.) not included.

With a double set of platens, one specially designed for mitre cuts.

Motor assembly mounted on sliding bearings, with vertically

adjustable and foldable mobile head for miter cuts.

Protection system for the use of segmented blades.

With guide for repetitive cuts.

Aluminium working surface removable for easy cleaning.

New, removable water tank system.

Machine supplied without the cable.

Ceramic fixing accessory NOT included.

DIAMANT DS-250 1300 220V 60HZ

ALFANOOS

DIAMANT DX-350 1300



Machine with vertically adjustable mobile head with plunge cut capability for large and thick format tiles. For tiling, earthenware, marble, granite and other materials.

Mixed modular structure, in aluminium and steel for maximum lightness and resistance.

Retractable legs with "shield" function and wheels for easy transportation.

Aluminium guide with anti-flexion geometry with measuring guide and lateral stops for longitudinal cuts.

With thermal and overload security switches.

Water pump refrigeration of blade (with flow control valve).

Ø 14" (350 mm.) diamond blade not included.

Allows the use of a Ø 12" (300 mm.) blade.

Adjustable mobile head with plunge cut capability.

Motor assembly mounted on sliding bearings, vertically adjustable and foldable mobile head for miter cuts.

Protection system for the use of segmented blades.

Superior motor and transmission by belt.

With guide for repetitive cuts.

Aluminium working surface removable for easy cleaning.

New, removable water tank system.

Machine supplied without the cable.

Ceramic fixing accessory NOT included.

DIAMANT DX-350 1300 220V 60HZ

ALFANOOS



DIAMANT DX-350 1000

Machine with vertically adjustable mobile head with plunge cut capability for large and thick format tiles. For tiling, earthenware, marble, granite and other materials.

Mixed modular structure, in aluminium and steel for maximum lightness and resistance.

Retractable legs with "shield" function and wheels for easy transportation.

Aluminium guide with anti-flexion geometry with measuring guide and lateral stops for longitudinal cuts.

With thermal and overload security switches.

Water pump refrigeration of blade (with flow control valve).

Ø 14" (350 mm.) diamond blade not included.

Allows the use of a Ø 12" (300 mm.) blade.

Adjustable mobile head with plunge cut capability.

Motor assembly mounted on sliding bearings, vertically adjustable and foldable mobile head for miter cuts.

Protection system for the use of segmented blades.

Superior motor and transmission by belt.

With guide for repetitive cuts.

Aluminium working surface removable for easy cleaning.

New, removable water tank system.

Machine supplied without the cable.

Ceramic fixing accessory NOT included.

DIAMANT DX-350 1000 220V 60HZ

ALFANOOS



DIAMANT DR-350

30/04/2012

For ceramic tiles and all types of building materials such as brick, facebrick, fire brick, etc.

With thermal and overload protection devices.

Water pump refrigeration of blade (with flow control valve).

Diamond Blade Ø 12" (300 mm.) - 14" (350 mm.) not included.

Vertically mobile head with plunge cut capability and foldable head for miter cuts.

Electric cable: 4.9 ft. (1,5 m.)

With guide to allow repetitive cuts.

Large sliding table 22 7/8" x 20 2/3" (58 x 52 cm.) mounted on sealed bearings.

Direct drive.

DIAMANT DR-300-EN 220V 60Hz.

الفاست



TS Professional Tile Cutters

Light and functional tile cutter ideal for cutting ceramics.

High Performance Single-point breaker.

Chromed and rectified steel guides, with anti-corrosion treatment.

Lateral Stop for straight and 45° Repetitive Cutting.

Ergonomic Shape and Reinforced Base.

Supplied with case and complete set of tools Ø 1/4" (6 mm.) and 13/32" (10 mm.).

Direct vision of the scoring and cutting line.

Ø 1/4" (6 mm.) to 7/8" (22 mm.) adaptable and interchangeable scoring wheels.

TS-40 TILE CUTTER 17" (43 cm.)

TS-50 TILE CUTTER 23" (57 cm.)

TS-50-L TILE CUTTER 24" (60 cm.)

TS-60 TILE CUTTER 26" (66 cm.)



TS-PLUS Professional Tile Cutters

Light and functional tile cutter ideal for cutting ceramic tiles with high performance breaker.

High Performance Single-point breaker.

Chromed and rectified steel guides, with anti-corrosion treatment.

Lateral Stop for straight and 45° Repetitive Cutting.

Ergonomic Shape and Reinforced Base.

Special Mounting for the Breaking System Lever.

Supplied with case and complete set of tools.

New exclusive design

Direct vision of the scoring and cutting line.

Ø 1/4" (6 mm.) to 7/8" (22 mm.) adaptable and interchangeable scoring wheels.


Adaptable accessories:

Adjustable Square (Ref. 18820 / 21 / 22)

Manual drill (Ref. 15925 / 27).

Maintenance Kit (Ref. 18980).

TS-70-PLUS TILE CUTTER 29" (75 cm.)

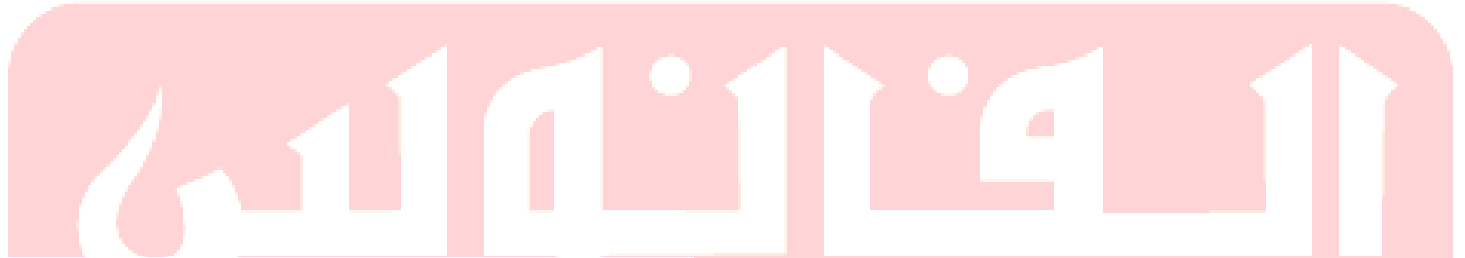

TM PROFESSIONAL TILE CUTTERS

Tile cutter with high-performance adjustable breaking system. Ideal for cutting clay and earthenware.



NOOS

TM-70 TILE CUTTER 28" (70 cm.)

TM-90 TILE CUTTER 37" (92 cm.)



TR-S Professional Tile Cutters

Tile cutter with mobile breaking system ideal for cuts of 45° with swivel square and angular measurement system of high precision.

High performance moving Breaking System.
Chromed and rectified steel guides, with anti-corrosion treatment.

One-piece swivel square with central pivot and angular measuring system for making repetitive cuts at 0-45°. Supplied with case and complete set of tools Ø 1/4" (6 mm.) and 13/32" (10 mm.).

Lateral Stop for straight and 45° Repetitive Cutting.

Two-layer base with shock absorption effect.

Base accessory for large formats.

Direct vision of the scoring and cutting line.

Ø 1/14" (6 mm.) to 7/8" (22 mm.) adaptable and interchangeable scoring wheels.

TR-600-S TILE CUTTER 24" (60 cm.)

TR-700-S TILE CUTTER 28" (71 cm.)



TR Professional tile cutters

Tile cutter with mobile breaking system ideal for cuts of 45°.

High Performance moving breaking system.

Chromed and rectified steel guides, with anti-corrosion treatment.

Lateral Stop for straight and 45° Repetitive Cutting.

Supplied with case and complete set of tools.

Angular measuring system for from 0 to 45° Cutting.

Base accessory for large formats.

Direct vision of the scoring and cutting line.

Ø 1/4" (6 mm.) to 7/8" (22 mm.) adaptable and interchangeable scoring wheels.

TR-600 TILE CUTTER 24" (60 cm.)



TX Professional Tile Cutters

Completely redesigned model with a new angular measurement system. Cutters specially suitable for cutting materials of great hardness.

With moving breaking system.

New reinforced Breaking-System.

Double set of rectified steel guides, with anti-corrosion treatment

Angular measuring system for straight and 45° Cutting. For large format tiles.

Lateral Stop for straight and 2 scoring wheels.

Two-layer base with shock absorption effect.

Base accessory for large formats.

Direct vision of the scoring and cutting line.

New greater resistance transport case.

Ø 5/16" (8 mm.) to 7/8" (22 mm.) adaptable and interchangeable scoring wheels.

Adaptable accessories:

Square accessory (Ref. 17850).

Manual drill (Ref. 15925).

Maintenance Kit (Ref. 18980)

TX-700

TX-900

الافانوس

ALFANOOS



TX-N Professional Tile Cutters

Completely redesigned model with a new angular measurement system. Cutters specially suitable for cutting materials of great hardness.

With moving breaking system.

New reinforced Breaking-System.

Double rectified steel guides, with anti-corrosion treatment.

For large format tiles.

One-piece swivel square with central pivot and angular measuring system for making repetitive cuts at 0 and 45°.

"FastFix" system quickly holds the square firmly in place.

Lateral Stop for straight and 2 scoring wheels.

New greater resistance transport case.

Two-layer base with shock absorption effect.

Base accessory for large formats.

Direct vision of the scoring and cutting line.

Ø 5/16" (8 mm.) to 7/8" (22 mm.) adaptable and interchangeable scoring wheels.

Includes wheel kit for improved mobility (Only TX-1200-N).

Adaptable accessories:

Manual drill (Ref. 15925).

Maintenance Kit (Ref. 18980).

TX-700-N

TX-900-N

TX-1200-N

TX-1500-N

الفا نوكس
ALFANOOS



SPEED PLUS Semi-Professional Tile Cutters

With moving breaking system.

Chromed and rectified steel guides, with anti-corrosion treatment.

In models 72 and 92 solid guides of Ø20 mm. for a greater

torsion resistance and a larger pitcher.

With side stop, for Repetitive and 45° square cutting.

In models 72 and 92, supplement aluminium base for tiles of large format.

Includes Scoring Wheel Ø 5/16" (8 mm.) TUNGSTEN CARBIDE.

Direct vision of the scoring and cutting line.

Ø 1/4" (6 mm.) to 7/8" (22 mm.) adaptable and interchangeable scoring wheels.

Adaptable accessories:

Maintenance Kit (Ref. 18980).

Manual drill (Ref.13970).

SPEED PLUS-62 25" (62 cm.)

SPEED PLUS-72 28" (72 cm.)

SPEED PLUS-92 36" (92 cm.)

SPEED PLUS-62 WITH CARRYING CASE 25" (62 cm.)

SPEED PLUS-72 WITH CARRYING CASE 28" (72 cm.)

SPEED PLUS-92 WITH CARRYING CASE 36" (92 cm.)